

H.I.D AREA LIGHTING

B1300 SERIES-HID

S P E C I F I C A T I O N S

HOUSING and RISER

Durable, corrosion resistant cast aluminum (A356 alloy; < 0.2% Cu) base, unlit riser and top cap, minimum .250" wall thickness. Lit riser is extruded, minimum .188" wall thickness. All visible welds are blended, all exposed hardware is stainless steel.

OPAL LENS (WA)

Opal acrylic lens is located at the recess of the vertical flutes, protects the internal lamp and provides uniform, diffuse illumination.

ELECTRICAL MODULE


All electrical components are UL and cUL recognized are mounted on a single plate and factory prewired with quick-disconnect plugs. All HID lamps are medium base (E26) or Bi-pin Base (G12). Electronic MH ballasts have a power factor of >.95 (35/39W - 100W) -20°F starting, 120-277V and have lamp End-of-life protection. 347V option utilizes a step down transformer to the electronic ballast. Magnetic MH ballasts are high power factor (35/39W - 100W), -20°F starting, multi-tap 120-277V, 60Hz. All HPS ballasts are core and coil, high-reactance, high power factor (35/39W - 100W), -40°F starting. Electronic CFL ballasts are high power factor 120 - 277 voltage sensing. GX24-q4 socket supplied for all 18w - 42w triple tube lamps.

FINISH

Electrostatically applied TGIC Polyester Powder Coat on substrate prepared with 20 PSI power wash at 140°F. Four step media blast and iron phosphate pretreatment for protection and paint adhesion. 400°F bake for maximum hardness and durability.



PROJECT NAME: _____

PROJECT TYPE: _____

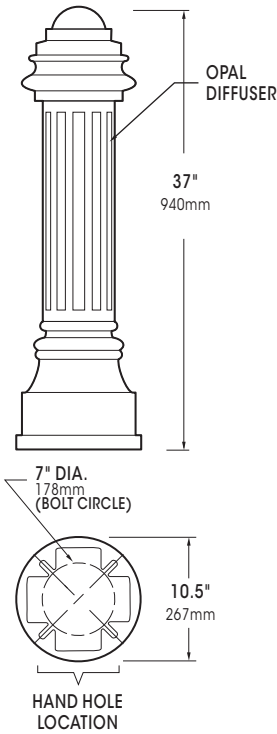

B13EL-CAP

PATENT PENDING

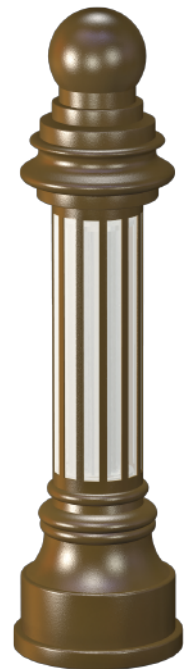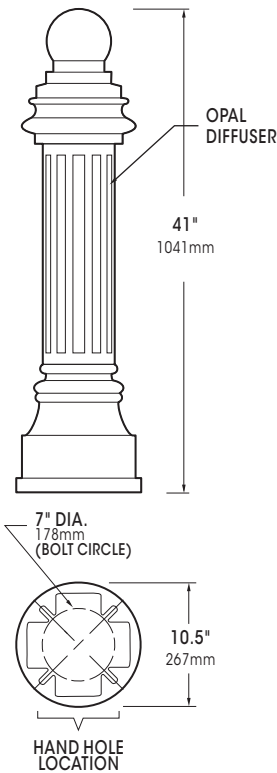

B13E-BAL

PATENT PENDING







2014246

B1300 SERIES-HID


S P E C I F I C A T I O N S

ACCESSORIES



GROUND MOUNTING


7" DIA. BOLT CIRCLE



ANCHOR BOLT(4) 3/4" X 18"


(SEE NOTE)*

WIRING AND FOOTING BY OTHERS

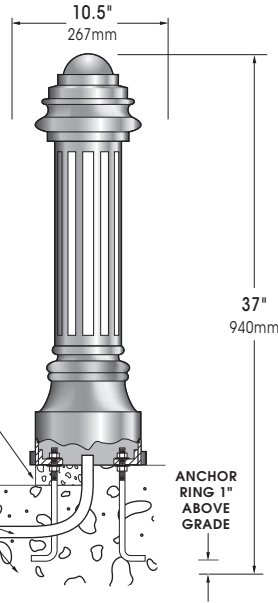


*When mounting in soil, anchor bolt fasteners and other hardware must be protected from soil by grouting.

LAMP WATTAGE

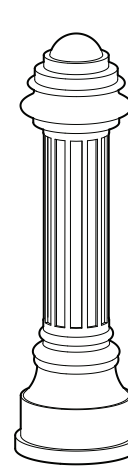

B13EL-CAP
LAMP SIZE: 35 - 100WATT

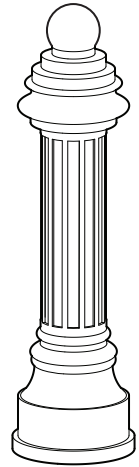

B13E-BAL
LAMP SIZE: 35 - 100WATT

Spec/Order Example: B13E-BAL/VL-SYM/70THPS277/RAL-9003

L I G H T E D S P E C / O R D E R I N G I N F O R M A T I O N

MODEL	OPTICS	WATTAGE	TYPE	VOLTAGE	FINISH	OPTIONS
MODEL	OPTICS	LAMP			FINISH	OPTIONS
LIGHTED		WATTAGE	TYPE	VOLTAGE	STANDARD TEXTURED FINISH	
<input type="checkbox"/> B13EL-CAP	<input type="checkbox"/> VERTICAL LAMPVL-SYM	<input type="checkbox"/> 100	<input type="checkbox"/> PSMH	<input type="checkbox"/> 120	<input type="checkbox"/> BLACK RAL-9005-T	INTERNAL HOUSE SIDE SHIELD <input type="checkbox"/> 90° HS90 <input type="checkbox"/> 135° HS135 <input type="checkbox"/> 180° HS180
<input type="checkbox"/> B13E-BAL		<input type="checkbox"/> 70T ¹	<input type="checkbox"/> HPS	<input type="checkbox"/> 208 ³	<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> DIMMABLE DRIVER(S) (0-10V) DIM
		<input type="checkbox"/> 70		<input type="checkbox"/> 240	<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> HIGH-LOW DIMMING FOR HARDWIRED SWITCHING OR NON-INTEGRATED MOTION SENSOR HLSW
		<input type="checkbox"/> 50T ¹		<input type="checkbox"/> 277	<input type="checkbox"/> DARK BRONZE RAL-8019-T	<input type="checkbox"/> 10KV SURGE PROTECTOR. 10SP
		<input type="checkbox"/> 50		<input type="checkbox"/> 347 ⁴	<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> 20KV SURGE PROTECTOR (240V & 480V Only) ... 20SP
		<input type="checkbox"/> 42CFL ²		<input type="checkbox"/> 480	FOR SMOOTH FINISH REPLACE SUFFIX "T" WITH SUFFIX "S" (EXAMPLE: RAL-9500-S)	<input type="checkbox"/> DUPLEX RECEPTACLE ... DUP
		<input type="checkbox"/> 35HPS			SEE USALTG.COM FOR ADDITIONAL COLORS	<input type="checkbox"/> GROUND FAULT RECEPTACLE GFI
						<input type="checkbox"/> MAILBOX - SINGLE MBS
						<input type="checkbox"/> MAILBOX - DOUBLE MBD
						<input type="checkbox"/> BOLLARD EYE BOLT ... BEB

NOTES:
1 - TUBULAR LAMP, G12 BASE
2 - GX24q-4 BASE SUITABLE FOR
3 - N/A FOR 35HPS ANFD 50HPS TUBE LAMPS 42 WATT
TRIPLE 18 THRU
4 - N/A FOR 35HPS