


B D A R S

[75 WATT MAX.]



FLAT RING

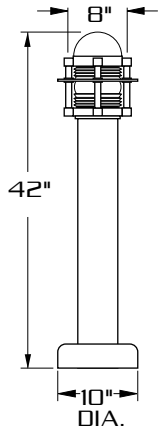

REFLECTOR



VERTICAL RIBS

SPECIFICATIONS

HOUSING: DURABLE, CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION. FOUR HEAVY WALL EXTRUDED VERTICAL RIBS AT 90° SURROUND OPTICAL TRAIN.

OPTICAL TRAIN: **(FR)** CLEAR PRISMATIC POLYCARBONATE REFRACTOR PROVIDES SYMMETRIC LIGHT DISTRIBUTION. DECORATIVE CAST ALUMINUM RING ENTIRELY SURROUNDS OPTICAL CHAMBER.

OPTIONS:

(AR) DECORATIVE ANGLED SPUN ALUMINUM REFLECTOR ENTIRELY SURROUNDS OPTICAL CHAMBER.

(VR) CLEAR PRISMATIC POLYCARBONATE REFRACTOR PROVIDES SYMMETRIC LIGHT DISTRIBUTION.

GASKETING: CLOSED CELL SILICONE.

LAMP HOLDER: MEDIUM BASE PORCELAIN.

LAMP: [BY OTHERS]

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

SHAFT: 5" DIA. EXTRUDED FROM 6063 ALLOY ALUMINUM.


ANCHORAGE: [4] 3/8"X10" FULLY GALVANIZED ANCHOR BOLTS EACH SUPPLIED WITH TWO NUTS AND TWO WASHERS.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.





OPTICS


STANDARD:



OPTIONS:




**WALL MOUNT
STYLE**

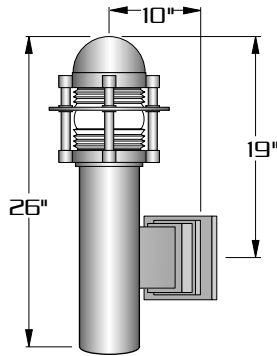


EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
13 - 75 WATT**

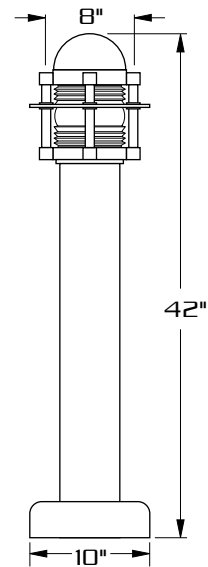

EXTRUDED ALUMINUM CONSTRUCTION.

INTERGRAL CAST ALUMINUM BALLAST HOUSING.

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
BDAR5					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
B D A R 5	STANDARD: <input type="checkbox"/> FLAT RING FR	WATTAGE TYPE VOLTAGE <input type="checkbox"/> 75 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 70 <input type="checkbox"/> MH <input type="checkbox"/> 277 <input type="checkbox"/> 50 <input type="checkbox"/> MV <input type="checkbox"/> MT <input type="checkbox"/> 35 <input type="checkbox"/> PL <input type="checkbox"/> 26 <input type="checkbox"/> INC <input type="checkbox"/> 18 <input type="checkbox"/> 13	GROUND INSTALLATION 7 1/2" DIA BOLT CIRCLE 10" DIA. ANCHOR BOLT (4) 3/8" X 10"	STANDARD TEXTURED FINISH <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500) SEE WEBSITE FOR ADDITIONAL COLORS	<input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180° <input type="checkbox"/> DUPLEX RECEPTACLE DUP <input type="checkbox"/> GROUND FAULT RECEPTACLE GFI <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF <input type="checkbox"/> WALL MOUNT WM OPTIONAL HEIGHTS: <input type="checkbox"/> 30" <input type="checkbox"/> 36"