


BRAL8

[100 WATT MAX.]



CAST LOUVER

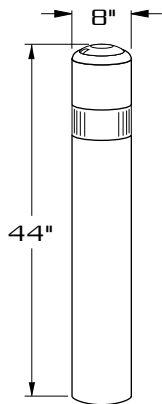

INTERNAL LOUVER



PRISMATIC GLASS
REFRACTOR



OPAL DIFFUSER

SPECIFICATIONS

HOUSING: EXTRUDED ALUMINUM CONSTRUCTION.

TOP CAP: DURABLE CAST ALUMINUM CONSTRUCTION, WITH CLEAR OR OPAL POLYCARBONATE LENS FOR UPLIGHT.

OPTICAL TRAIN: **[CL]** DURABLE, CORROSION RESISTANT CAST ALUMINUM LOUVER SYSTEM PROVIDES 30° CUT-OFF FOR BRIGHTNESS CONTROL. H.I.D. UNITS SUPPLIED WITH INTERNAL CLEAR BOROSILICATE GLASS DIFFUSER. FLUORESCENT UNITS SUPPLIED WITH INTERNAL CLEAR POLYCARBONATE DIFFUSER.

OPTICAL OPTIONS:

[IL] CLEAR ACRYLIC LENS SURROUNDS ANODIZED ALUMINUM LOUVER TRAIN.

[PG] CLEAR ACRYLIC LENS SURROUNDS PRISMATIC GLASS REFRACTOR.

[WA] 1/4" OPAL ACRYLIC DIFFUSER.

GASKETING: CLOSED CELL SILICONE .

LAMP HOLDER: MEDIUM BASE PORCELAIN.

LAMP: [BY OTHERS]

BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO A REMOVABLE BALLAST TRAY. BALLAST IS EQUIPPED WITH FACTORY INSTALLED QUICK DISCONNECT PLUG.

BASE PLATE: PRECISE ONE PIECE CAST ALUMINUM CONSTRUCTION. ANCHOR PLATE IS MECHANICALLY FASTENED TO HOUSING.


ANCHORAGE: [4] 3/8"X10" FULLY GALVANIZED ANCHOR BOLTS EACH SUPPLIED WITH TWO NUTS AND TWO WASHERS.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.




STANDARD:

OPTICS



(IL)
INTERNAL LOUVER
SUPPLIED WITH
CLEAR ACRYLIC LENS

OPTIONS:




(CL)
CAST LOUVER
H.I.D. UNITS
SUPPLIED WITH
INTERNAL GLASS DIFFUSER

FLUORESCENT UNITS
SUPPLIED WITH INTERNAL
POLYCARBONATE DIFFUSER




(PG)
PRISMATIC GLASS
SUPPLIED WITH
CLEAR ACRYLIC LENS




(WA)
OPAL ACRYLIC

**WALL MOUNT
STYLE**

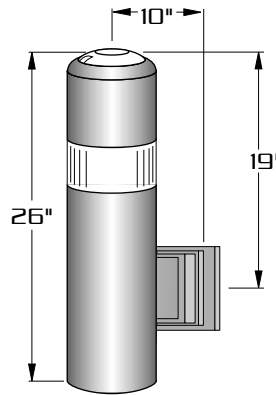


EXTRUDED ALUMINUM ARM AND
CAST ALUMINUM WALL BRACKET
ASSEMBLY PROVIDED WITH BUILT
IN GASKETED WIRE ACCESS FOR
FIXTURE/SUPPLY WIRE CONNECTION.

WALL PLATE



**LAMP SIZE:
13 - 100 WATT**

OPAL DIFFUSER

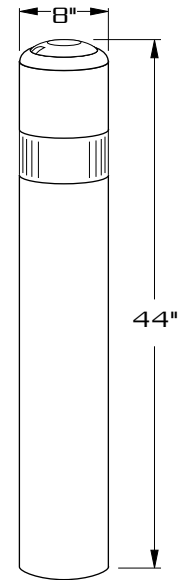

EXTRUDED ALUMINUM
CONSTRUCTION.

INTEGRAL CAST ALUMINUM
BALLAST HOUSING.

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
BRAL8					
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
B R A L 8	<p>STANDARD:</p> <input type="checkbox"/> CAST ALUMINUM LOUVER CL	<p>WATTAGE TYPE VOLTAGE</p> <input type="checkbox"/> 100 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 75 <input type="checkbox"/> MH <input type="checkbox"/> 277 <input type="checkbox"/> 70 <input type="checkbox"/> MV <input type="checkbox"/> MT <input type="checkbox"/> 50 <input type="checkbox"/> PL <input type="checkbox"/> 35 <input type="checkbox"/> INC <input type="checkbox"/> 26 <input type="checkbox"/> 18 <input type="checkbox"/> 13	<p>GROUND INSTALLATION</p> <p>8" DIA. BOLLARD</p> <p>6" DIA. BOLT CIRCLE</p> <p>ANCHOR BOLT (4) 3/8" X 10"</p>	<p>STANDARD TEXTURED FINISH</p> <input type="checkbox"/> BLACK RAL-9005-T <input type="checkbox"/> WHITE RAL-9003-T <input type="checkbox"/> GREY RAL-7004-T <input type="checkbox"/> DRK BRONZE RAL-8019-T <input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> HOUSE SIDE SHIELD 90° HS 90° 135° HS 135° 180° HS 180°
	<p>OPTIONS:</p> <input type="checkbox"/> INTERNAL LOUVER IL <input type="checkbox"/> PRISMATIC GLASS TYPE V PG-V <input type="checkbox"/> PRISMATIC GLASS TYPE III PG-III <input type="checkbox"/> OPAL ACRYLIC WA	<input type="checkbox"/> DUPLEX RECEPTACLE DUP <input type="checkbox"/> GROUND FAULT RECEPTACLE GFI <input type="checkbox"/> SINGLE FUSE (120V., 277V) SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF <input type="checkbox"/> WALL MOUNT WM			
				<p>FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)</p> <p>SEE WEBSITE FOR ADDITIONAL COLORS</p>	<p>OPTIONAL HEIGHTS:</p> <input type="checkbox"/> 32" <input type="checkbox"/> 38"