



DSBPT3

[400 WATT MAX.]




SIDE VIEW



FRONT VIEW

E.P.A. = 1.55

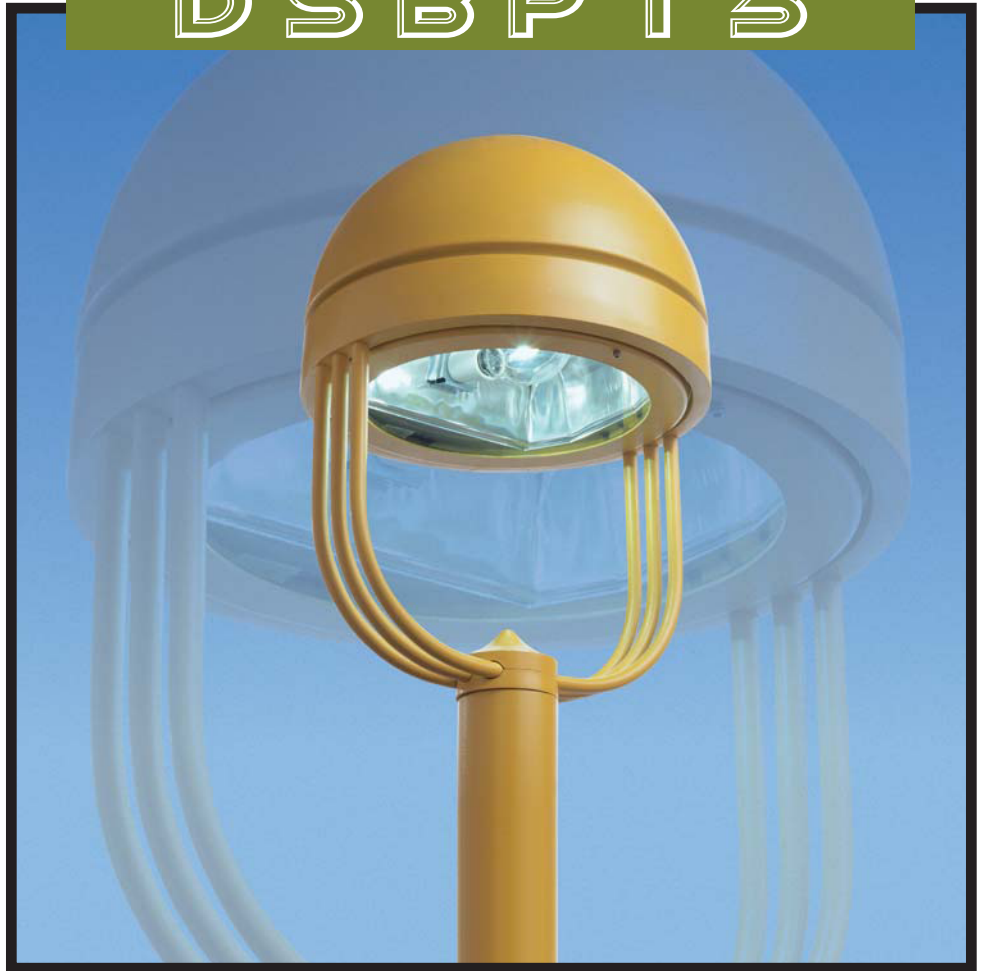

SPECIFICATIONS

HOUSING: ONE PIECE HEAVY WALL SPUN ALUMINUM HOUSING. HEAVY WALL SPUN ALUMINUM DOME.

LENS ASSY: ONE PIECE HINGED HEAVY WALL DIE FORMED ALUMINUM DOOR SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. CAPTIVE THUMB SCREW DISENGAGES LENS ASSEMBLY AND ACTIVATES ACCUHINGE™ HINGE TO ALLOW LENS ASSEMBLY TO HINGE AWAY FROM HOUSING FOR LUMINAIRE ACCESS WITHOUT THE USE OF TOOLS.

OPTICS: COMPUTER DESIGNED ONE PIECE SEMI SPECULAR HYDROFORMED REFLECTOR. COMBINES WITH CLEAR TEMPERED GLASS LENS TO PRODUCE A HIGHLY EFFICIENT, SHARP CUTOFF.

GASKETING: CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING WORKS IN COMBINATION WITH ACCUHINGE™ HINGE TO PRESSURE SEAL OPTICAL CHAMBER.

LAMP HOLDER: MOGUL BASE PORCELAIN.

LAMP: (BY OTHERS)


BALLAST: H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE.

ARM: SIX (6) EXTRUDED ALUMINUM (.84 O.D.) ARMS WELDED TO A CAST ALUMINUM POLE TOP FITTER. ARMS ARE INTERNALLY WELDED TO HOUSING.

FINISH: POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOPCOAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



MOUNTING STYLES




STANDARD TENON ASSEMBLY FOR 4" & 5" DIA. POLES.

DECORATIVE RING SUPPLIED FOR 6" DIA. POLES. (SPECIFY POLE I.D.)

PTA MOUNTING / POLE REQUIRED			
	4" DIA.	5" DIA.	6" DIA.
HPS	70-100	150	200-400
MH	70	100-175	200-400
MV	75	100-175	250-400

BALLAST IS MOUNTED INSIDE POLE

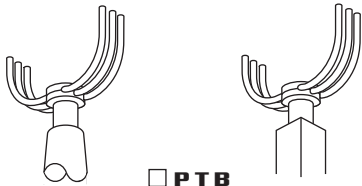


TENON ASSEMBLY FOR TAPERED OR SQUARE POLES. TENON ASSEMBLY IS ALSO AVAILABLE AS AN OPTION FOR 4", 5" OR 6" DIA. POLES

SPECIFY MOUNTING ASSEMBLY:

PTB27-TO FIT OVER 2 7/8" O.D. TENON.


PTB23-TO FIT OVER 2 3/8" O.D. TENON.

WALL MOUNT

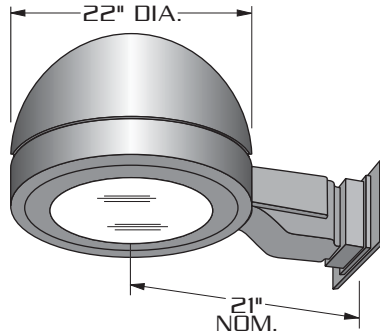


CORROSION RESISTANT CAST ALUMINUM CONSTRUCTION. ARM IS SUPPLIED WITH REMOVABLE CAST ALUMINUM TOP CAP FOR EASY ACCESS TO ELECTRICAL COMPONENTS.

WALL PLATE



**LAMP SIZE:
70 - 400 WATT**

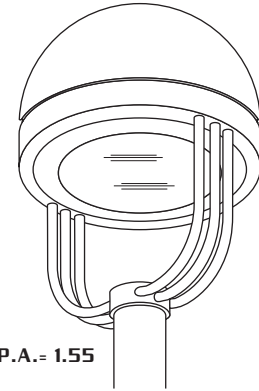

E.P.A.= 1.55

OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS DIFFUSER.

ORDERING INFORMATION

MODEL NO.:	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS	
DSBPT3						
MODEL NO.:	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS	
D S B P T 3	<input type="checkbox"/> TYPE III III (hydroform)	<input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120	 <input type="checkbox"/> PTA <input type="checkbox"/> PTB23 (TO FIT 2 3/8" O.D.) <input type="checkbox"/> PTB27 (TO FIT 2 7/8" O.D.) WALL MOUNT <input type="checkbox"/> WM	STANDARD TEXTURED FINISH	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER LEX	
	<input type="checkbox"/> TYPE IV (FORWARD THROW) IV (segmented)	<input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208		<input type="checkbox"/> BLACK RAL-9005-T	<input type="checkbox"/> HOUSE SIDE SHIELD HS	
	<input type="checkbox"/> TYPE V V-SQ (segmented)	<input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240		<input type="checkbox"/> WHITE RAL-9003-T	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) PC+V	
		<input type="checkbox"/> 175 <input type="checkbox"/> 277		<input type="checkbox"/> GREY RAL-7004-T	<input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) TPC+V	
		<input type="checkbox"/> 150 <input type="checkbox"/> 480		<input type="checkbox"/> DRK BRONZE RAL-8019-T	<input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY TPR	
		<input type="checkbox"/> 100 <input type="checkbox"/> MT		<input type="checkbox"/> GREEN RAL-6005-T	<input type="checkbox"/> SINGLE FUSE (120V., 277V) SF	
		<input type="checkbox"/> 75			<input type="checkbox"/> DOUBLE FUSE (208V., 240V) DF	
		<input type="checkbox"/> 70			<input type="checkbox"/> TAMPER PROOF TP	
		PTB MOUNTING ACCEPTS 250 W. MAX			FOR SMOOTH FINISH REMOVE SUFFIX "T" (EXAMPLE: RAL-9500)	
		METAL HALIDE UNITS ONLY USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.			SEE WEBSITE FOR ADDITIONAL COLORS	