



# VERSALUX-G

[1000 WATT MAX.]

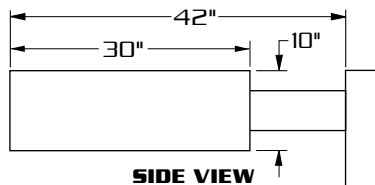


SIDE VIEW

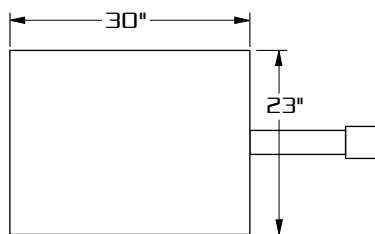

TOP VIEW

E.P.A.= 3.0

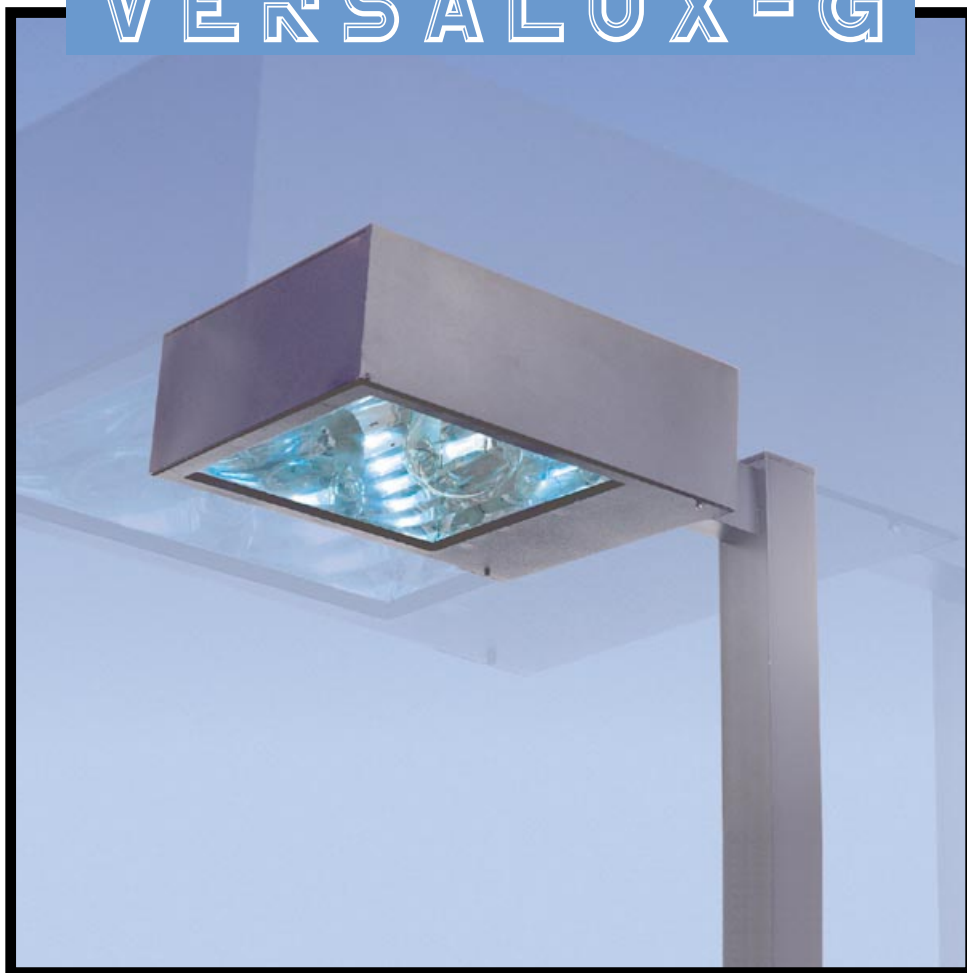

WM



1



2-180



2-90



3-90



3-120




4-90

## SPECIFICATIONS


- HOUSING:** ONE PIECE HEAVY GAUGE DIE FORMED ALUMINUM CONSTRUCTION CONTINUOUSLY SEAM WELDED. ELECTRICAL COMPONENTS MOUNTED IN SEPARATE BALLAST COMPARTMENT.
- LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. TWO CAPTIVE THUMB SCREWS DISENGAGE LENS ASSEMBLY FROM HOUSING WITHOUT THE USE OF TOOLS.
- OPTICS:** SEMI SPECULAR SEGMENTED REFLECTOR COMBINES WITH 3/16" CLEAR TEMPERED LENS TO PRODUCE A FORWARD THROW (TYPE IV) LIGHT DISTRIBUTION.
- GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.
- LAMP HOLDER:** MOGUL BASE PORCELAIN.
- LAMP:** (BY OTHERS)
- BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER. -20° STARTING TEMPERATURE.
- ARM:** 3"X5"X12" LONG HEAVY WALL EXTRUDED ALUMINUM. ARM IS SECURED TO HOUSING AND TO POLE WITH STAINLESS STEEL RODS.
- FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.





**TYPICAL SQUARE POLE TEMPLATE**

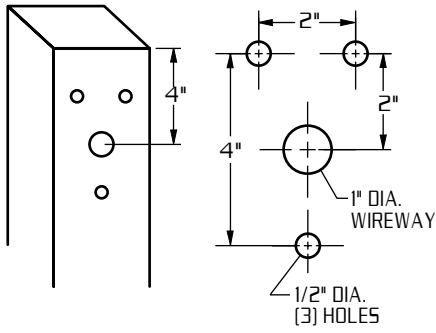

**TYPICAL ROUND POLE TEMPLATE**

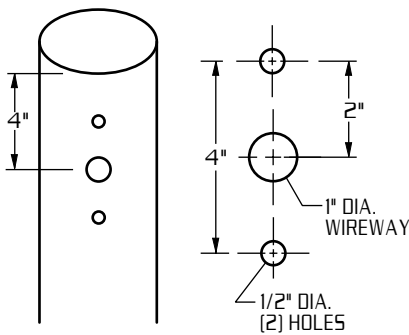


**WALL MOUNT**




EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.

**WALL PLATE**



**LAMP SIZE:  
400 - 1000 WATT**

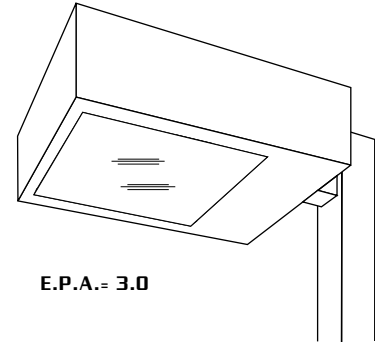

**E.P.A. = 3.0**

**RECTILINEAR HEAVY GAUGE ALUMINUM HOUSING.**

**THREE OPTICAL SYSTEMS ENCLOSED IN IMPACT RESISTANT TEMPERED GLASS LENS.**

**TOOLESS LUMINAIRE ACCESS.**

**ORDERING INFORMATION**

MODEL NO. : <b>VRS-G</b>	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
MODEL NO. :	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>V R S - G</b>	<input type="checkbox"/> TYPE III III.....	<input type="checkbox"/> 1000 <input type="checkbox"/> HPS <input type="checkbox"/> 120	<b>ARM MOUNT</b>	<input type="checkbox"/> DARK BRONZE <b>DBM</b>	<input type="checkbox"/> HOUSE SIDE SHIELD ..... <b>HS</b>
	<input type="checkbox"/> TYPE IV (FORWARD THROW) IV.....	<input type="checkbox"/> 400 <input type="checkbox"/> MH <input type="checkbox"/> 208	<input type="checkbox"/> 1 .....	<input type="checkbox"/> MEDIUM BRONZE <b>MBM</b>	<input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ..... <b>PC+V</b>
	<input type="checkbox"/> TYPE V V.....	<input type="checkbox"/> 240	<input type="checkbox"/> <b>ST 23</b> ..... (TO FIT OVER 2 3/8" O.D. ARM)	<input type="checkbox"/> BLACK <b>BKM</b>	<input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) ..... <b>TPC+V</b>
		<input type="checkbox"/> 277	<b>ADJUSTABLE KNUCKLE</b>	<input type="checkbox"/> WHITE <b>WTM</b>	<input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY ..... <b>TPR</b>
		<input type="checkbox"/> 480	<input type="checkbox"/> <b>NKLE23</b> ..... (TO FIT OVER 2 3/8" O.D. )	<input type="checkbox"/> SILVER <b>SLM</b>	<input type="checkbox"/> SINGLE FUSE (120V. , 277V) ..... <b>SF</b>
		<input type="checkbox"/> MT	<input type="checkbox"/> <b>NKLE27</b> ..... (TO FIT OVER 2 7/8" O.D. )	<b>OPTION:</b>	<input type="checkbox"/> DOUBLE FUSE (208V. , 240V) ..... <b>DF</b>
			<b>WALL MOUNT</b>	<input type="checkbox"/> ANODIZED <b>AZ</b>	
			<input type="checkbox"/> <b>WM</b> .....	ANODIZED HOUSING MUST HAVE PAINT FINISH COAT EXAMPLE: <b>AZDBM</b>	
			SEE ACCESSORIES SECTION FOR ST23 AND NKLE DETAILS	SEE PAGE 3 FOR ADDITIONAL COLORS	



660 WEST AVENUE O, PALMDALE, CA. 93551  
(661) 233-2000  
FAX NO. (661) 233-2001  
www.usaltg.com