

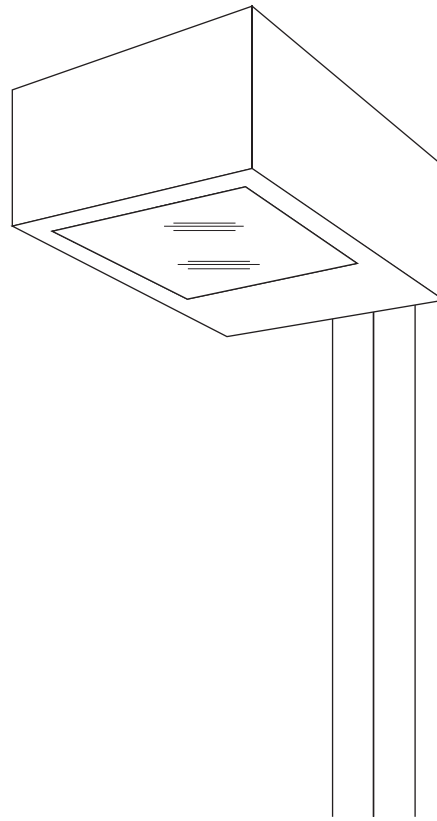


# VERSALUX-SEG

[400 WATT MAX.]



E.P.A.- 1.72



## SPECIFICATIONS

**HOUSING:** ONE PIECE HEAVY GAUGE DIE FORMED ALUMINUM CONSTRUCTION WITH SEPARATE BALLAST COMPARTMENT.

**LENS ASS'Y:** ONE PIECE HINGED HEAVY GAUGE DIE FORMED ALUMINUM DOOR FRAME SURROUNDS 3/16" CLEAR TEMPERED GLASS LENS. GLASS IS SEALED TO DOOR WITH HIGH TEMPERATURE SILICONE SEAL. TWO CAPTIVE THUMB SCREWS DISENGAGE LENS ASSEMBLY FROM HOUSING WITHOUT THE USE OF TOOLS.

**OPTICS:** PRECISE, COMPUTER DESIGNED SPECULAR SEGMENTED SIDE REFLECTORS WITH AN AUXILIARY HAMMER TONE PATTERNED TOP REFLECTOR COMBINES WITH LENS TO PRODUCE AN EXTREMELY EFFICIENT SHARP CUTOFF.

**GASKETING:** CLOSED CELL EPDM GASKETING COMPRESSED BETWEEN DOOR AND HOUSING SEALS OPTICAL CHAMBER.

**LAMP HOLDER:** M06UL BASE PORCELAIN.

**LAMP:** [BY OTHERS]

**BALLAST:** H.P.F./C.W.A. AUTOTRANSFORMER, -20° STARTING TEMPERATURE. ELECTRICAL COMPONENTS ARE MOUNTED TO HINGED REMOVABLE TRAY FOR EASY ACCESS.

**ARM:** 3"X5"X6" LONG HEAVY WALL EXTRUDED ALUMINUM. ARM IS SECURED TO HOUSING AND TO POLE WITH STAINLESS STEEL RODS.

**FINISH:** POLYESTER POWDER COAT-STATE OF THE ART 20 PSI PRESSURE POWER WASH AT 140° TEMPERATURE INCORPORATES FOUR STEP IRON PHOSPHATE PROCESS TO CLEANSE AND PRETREAT THE METAL SURFACE FOR MAXIMUM PAINT ADHESION. ELECTROSTATICALLY APPLIED TEXTURED POLYESTER POWDER TOP COAT IS BAKED AT 400° TEMPERATURE FOR MAXIMUM HARDNESS AND EXTERIOR DURABILITY.



660 WEST AVENUE O, PALMDALE, CA. 93551


(661) 233-2000

FAX NO. (661) 233-2001


www.usaltg.com

A2-3


**TYPICAL SQUARE POLE TEMPLATE**

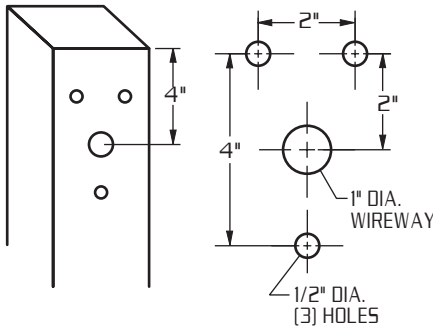

**WALL MOUNT**

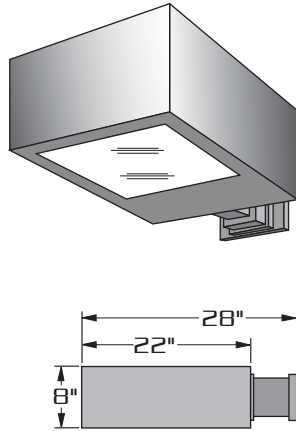


**LAMP SIZE:  
100 - 400 WATT**



**E.P.A.= 1.72**

**TYPICAL ROUND POLE TEMPLATE**

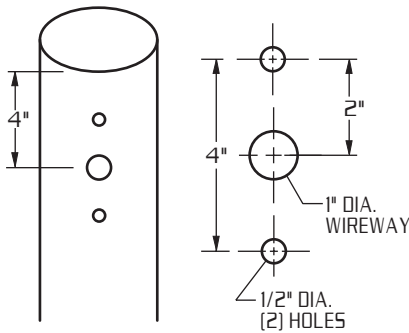

EXTRUDED ALUMINUM ARM AND CAST ALUMINUM WALL BRACKET ASSEMBLY PROVIDED WITH BUILT IN GASKETED WIRE ACCESS FOR FIXTURE/SUPPLY WIRE CONNECTION.


**RECTILINEAR HEAVY GAUGE ALUMINUM HOUSING.**

**FIELD ROTATABLE OPTICS, SEALED OPTICAL CHAMBER.**

**HINGED BALLAST TRAY, WITH QUICK DISCONNECT PLUG FOR EASY ACCESS TO HPF/CWA AUTOTRANSFORMER.**

**TOOLESS LUMINAIRE ACCESS.**

**WALL PLATE**



**ORDERING INFORMATION**

MODEL NO. : VRS-SEG	OPTICS	WATTAGE TYPE VOLTAGE	MOUNTING	FINISH	OPTIONS
------------------------	--------	----------------------	----------	--------	---------

MODEL NO. :	OPTICS	LAMP	MOUNTING	FINISH	OPTIONS
<b>V R S - S E G</b>	<input type="checkbox"/> TYPE III III.....	<b>WATTAGE TYPE VOLTAGE</b> <input type="checkbox"/> 400 <input type="checkbox"/> HPS <input type="checkbox"/> 120 <input type="checkbox"/> 250 <input type="checkbox"/> MH <input type="checkbox"/> 208 <input type="checkbox"/> 200 <input type="checkbox"/> MV <input type="checkbox"/> 240 <input type="checkbox"/> 175 <input type="checkbox"/> 277 <input type="checkbox"/> 150 <input type="checkbox"/> 480 <input type="checkbox"/> 100 <input type="checkbox"/> MT	<input type="checkbox"/> 1 ..... <b>STREET LIGHTING ARM MOUNT</b> <input type="checkbox"/> ST 23 ..... (TO FIT OVER 2 3/8" O.D. ARM)  <input type="checkbox"/> NKLE23 ..... (TO FIT OVER 2 3/8" O.D.)  <input type="checkbox"/> NKLE27 ..... (TO FIT OVER 2 7/8" O.D.)  <b>WALL MOUNT</b> <input type="checkbox"/> WM .....	<input type="checkbox"/> DARK BRONZE DBM <input type="checkbox"/> MEDIUM BRONZE MBM <input type="checkbox"/> BLACK BKM <input type="checkbox"/> WHITE WTM <input type="checkbox"/> SILVER SLM  <b>OPTION:</b> <input type="checkbox"/> ANODIZED AZ ANODIZED HOUSING MUST HAVE PAINT FINISH COAT EXAMPLE: AZDBM	<input type="checkbox"/> CLEAR POLYCARBONATE DIFFUSER ..... LEX <input type="checkbox"/> HOUSE SIDE SHIELD ..... HS <input type="checkbox"/> PHOTO CELL + VOLTAGE (EXAMPLE: PC120V) ..... PC+V <input type="checkbox"/> TWIST LOCK PHOTO CELL+VOLTAGE (EXAMPLE TPC120V) ..... TPC+V <input type="checkbox"/> TWIST LOCK RECEPTACLE ONLY ..... TPR <input type="checkbox"/> SINGLE FUSE (120V., 277V) ..... SF <input type="checkbox"/> DOUBLE FUSE (208V., 240V) ..... DF
		<b>METAL HALIDE UNITS ONLY</b> USE ED28 LAMP FOR 400 W. USE MEDIUM BASE LAMP FOR 100 W.	SEE ACCESSORIES SECTION FOR ST23 AND NKLE DETAILS	SEE PAGE 3 FOR ADDITIONAL COLORS	



660 WEST AVENUE O, PALMDALE, CA. 93551

(661) 233-2000  
FAX NO. (661) 233-2001

www.usaltg.com